


## Mineral Insulated RTD Probe with Protection Head

### General Specifications

- RTD Pt100 DIN Standard Element
- Maximum Temperature Rating 300°C
- All Sheath Material 316 SS
- Various terminal heads, (Bakelite, Aluminium, Stainless Steel)
- Optional head-mount transmitter.  
Model IN 690

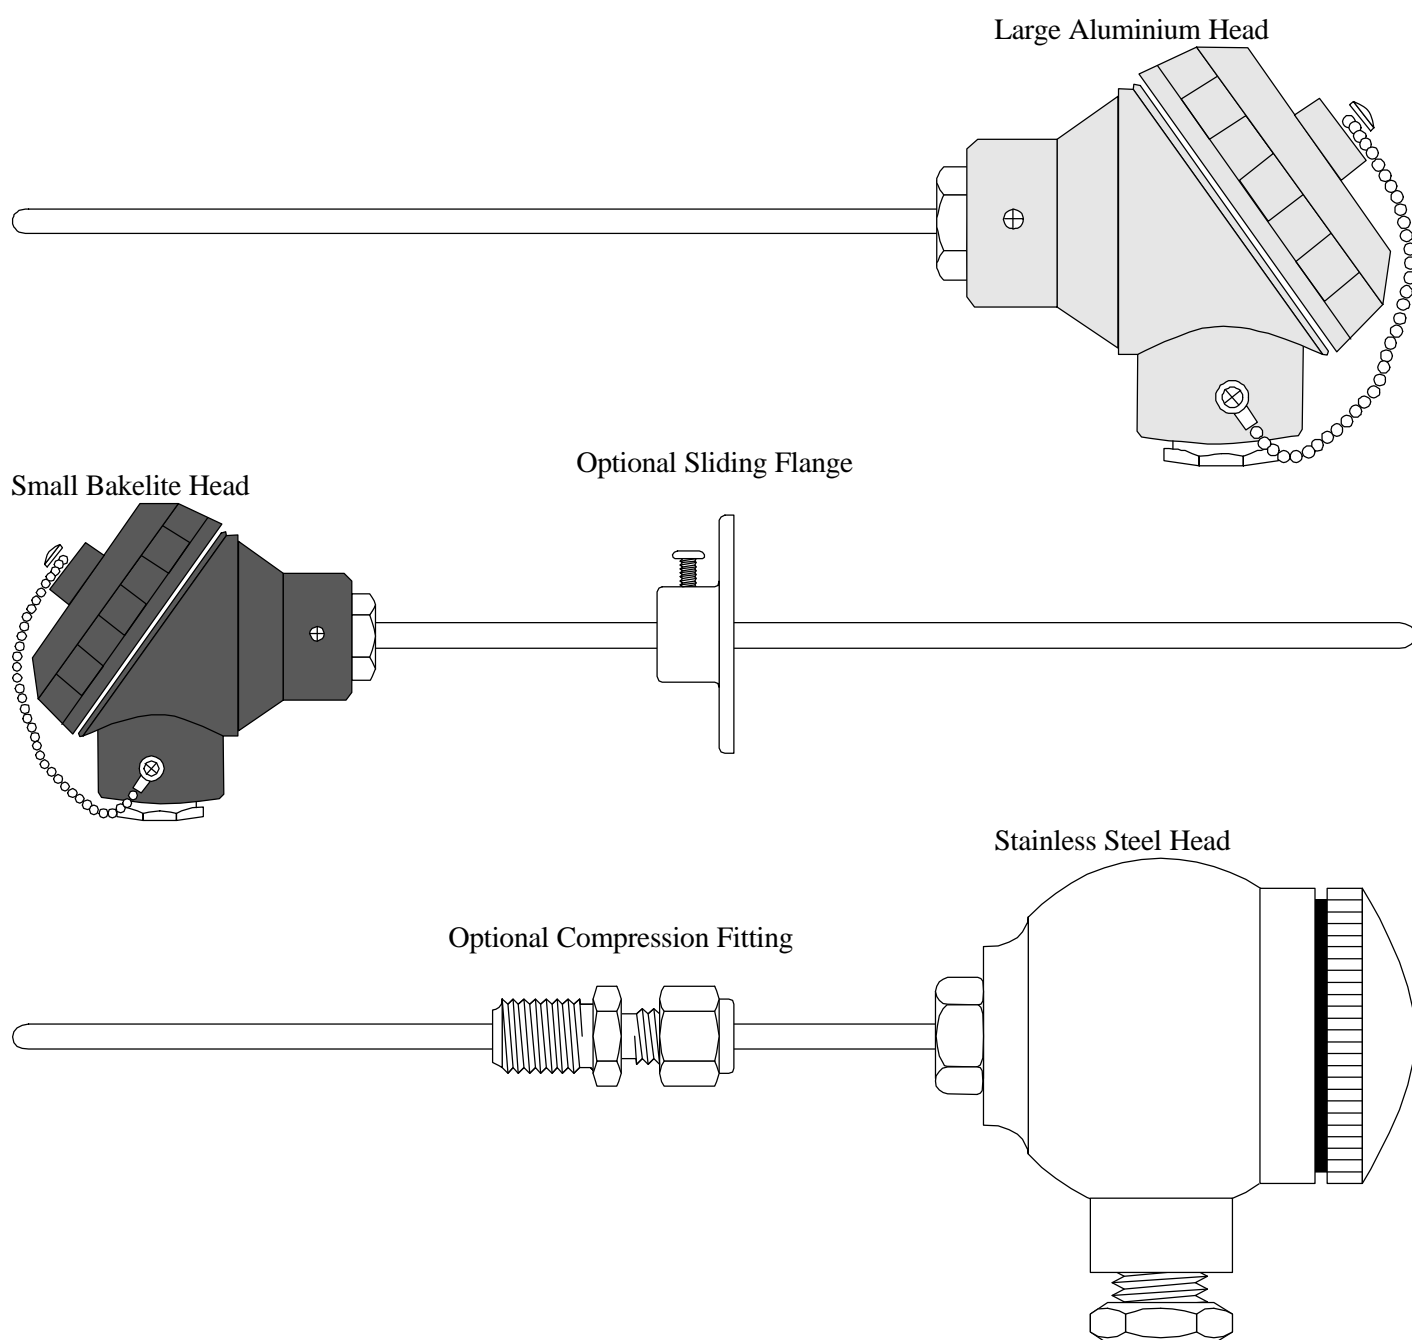

## Mineral Insulated RTD Probe with Protection Head

Item	Code				Specification
Model	MRH-				
Element		S			Single
		D			Duplex
		X			Others
Outer Diameter		6.0			Millimetres (Standard)
		X-			Other
Sheath Length			□□		Millimetres
Protection Head			SA		Small Aluminium
			SB		Small Bakelite
			LA		Large Aluminium
			LB		Large Bakelite
			SS		Stainless Steel
Transmitter			N		None
			TX		Head-Mount Transmitter *
Transmitter Range			N-		None
			□□		See Measuring Range Code
			X-		Other
Accessories			N		None
			S		Stainless Compression Fitting
			B		Brass Compression Fitting
			F		Sliding Flange
			X		Other

\*Fits large head only.

### Measuring Range Codes

Measuring Range	Code
-50 to 50 °C	55
0 to +50 °C	05
0 to +100 °C	10
0 to +150 °C	15
0 to +200 °C	20
0 to +250 °C	25
0 to +300 °C	30

Note: The above covers the more common RTD probes. We can supply probes to your particular specification.