


## Universal Thermocouple


### General Specifications

- K and J calibration
- Maximum temperature rating 400 °C
- Various lead length
- Fibreglass insulated lead with stainless steel overbraid (SSOB)

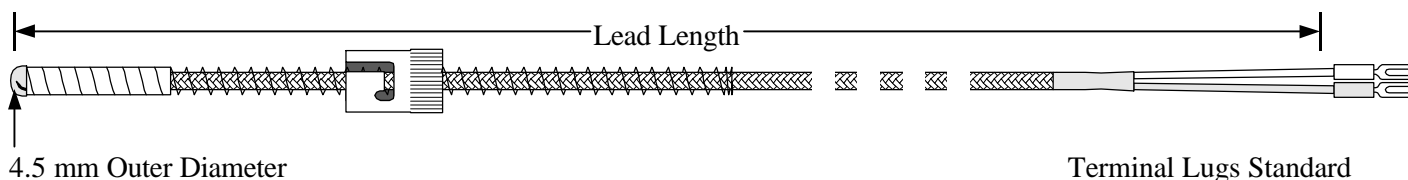

Item	Code		Specification
Model	UT-		
Calibration		K	Thermocouple
		J	Thermocouple
Lead Length		1.5-	Metres
		2.0-	Metres
		3.0-	Metres
		3.5-	Metres
Accessories		N	None
		A	Bayonet Adaptor
		P	Plug

Note: The above covers the more common Thermocouple probes. We can supply probes to your particular specification.

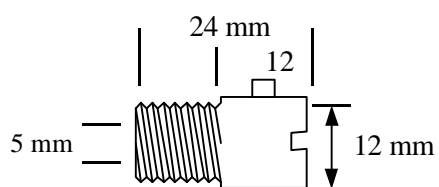

Bayonet Adaptor, Single Pin  
1/8" BSP Tapered Thread



Plug: Standard  
Round Pin

Part Number: IN-UTA